

SECTION A-A

THREAD DETAIL  
5 THREADS PER INCH  
0.200" [5.06 PITCH]

REFERENCE	TOLERANCE	DIMENSION	UNITS
E	±0.014 [0.35]	4.224 [107.29]	in [mm]
T	±0.014 [0.35]	4.343 [110.31]	in [mm]
H	±0.014 [0.35]	0.558 [14.17]	in [mm]
OAH	±0.014 [0.35]	0.633 [16.08]	in [mm]
OD	±0.014 [0.35]	4.464 [113.39]	in [mm]
PART WEIGHT	± 2.0	21.10	g

**PAGE 1 OF 2**

**DISCLAIMER**

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:

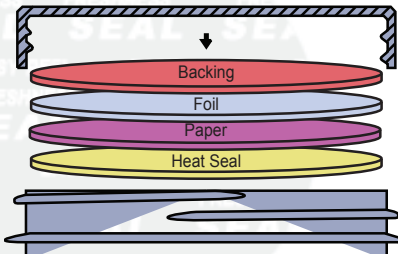


REF NO.:

DWG30300

DESCRIPTION:

110-400 PP Smooth Top, Smooth Sides Cap with Heat Seal

Product	.008" C1S FS 5-4		
Scope	One piece board backed heat induction foil innerseal which combines ease of removal with tamper-evident properties. It is suggested for sealing to PE, PP, PET, PVC, PS and properly treated glass containers. This material will vent gas through the paper layer and is suggested for use on dry products only.		
Composition	Material	Standard	Metric
	Backing	.008"	.2032 mm
	Foil	.001"	.0254 mm
	Paper	.002"	.0508 mm
	Heat Seal	.0015"	.0381 mm
			
Adhesive or resin bonding layers not shown.			
FDA Status:	21 CFR 177.1210	Recommended Storage and Handling: Refer to Website.	
Drug Master File (DMF):	#4544	EU / EP Reg.: Does not meet Article 3a of Reg. No. 2023/2006 and Article 3 of Reg. No. 1935/2004	
GTR Oxygen: 77.0 cc Oxygen/100 IN2 * 24hrs. @ 100° F, ASTM F-2622-08		MVTR: 0.371 gm water/100IN2 * 24 hrs. @ 75° F, ASTM F-1249	

**PAGE 2 OF 2**

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG30300

DESCRIPTION:

110-400 PP Smooth Top, Smooth Sides Cap with Heat Seal