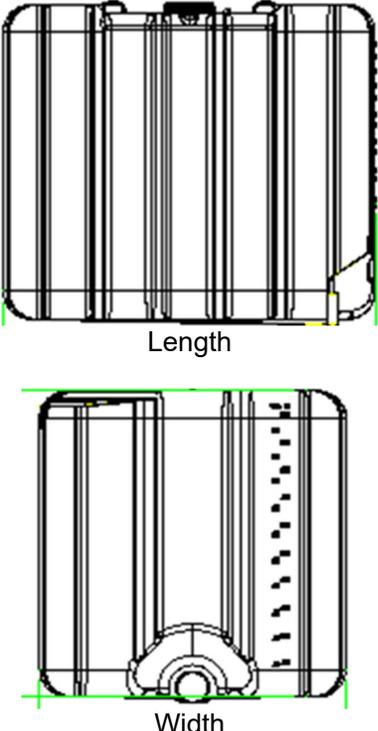


## GCUBE® 275 Bottle

<b>Product Identification Name</b>	GCUBE®, 275 Bottle	<b>Product Illustration</b> 
<b>Rated Capacity</b>	275 Gallons	
<b>Specific Gravity Maximum Rating</b>	1.9 SG	
<b>Maximum Fill Temperature</b>	150° F	
<b>Hydrostatic Pressure Rating</b>	100 kPa in Cage	
<b>Inner Receptacle</b>	<b>Blowmolded:</b> HMWHDPE <b>Resin:</b> Greif GB3 <b>Weight:</b> 34 pounds nominal <b>Length:</b> 45.75 inches nominal <b>Width:</b> 38.0 inches nominal <b>Height:</b> 39.75 inches nominal  Production leak-tested per 49 CFR 178.801(f) at 3 psi	
<b>Top Closure</b>	<b>Type:</b> 6" Cap with 2" Closure with Ventix Vent – Tamper Evident <b>Fabrication:</b> Injection molded	<b>Cap &amp; Plug Material:</b> PE <b>Gasket(s):</b> EPDM
<b>Representative Service Equipment</b>	<b>Type:</b> 2" Quick Disconnect Screwable Valve <b>Material:</b> Polypropylene	<b>Collar Gasket:</b> Viton (FKM) <b>Valve Seal Gasket(s):</b> EPDM
<b>UN Qualification</b>	Use for rebottling into GCUBE® 275 gallon structural equipment Use for remanufacture into Schuetz and Mauser 275 gallon structural equipment Refer to UN test report for the structure it is installed into for proper UN marks	

### DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG30160

DESCRIPTION:

GCube IBC Tote HDPE 275 Gallons with 6" Cap and 2" Ball Valve