

SECTION A-A

REFERENCE	DIMENSION	TOLERANCE	UNITS
E	1.013 [25.73]	±0.010 [0.25]	in [mm]
T	1.088 [27.64]	±0.010 [0.25]	in [mm]
H	0.695 [17.65]	±0.010 [0.25]	in [mm]
OAH	0.745 [18.92]	±0.010 [0.25]	in [mm]
OD	1.197 [30.40]	±0.010 [0.25]	in [mm]
PART WEIGHT	2.55	±0.50	g
THREAD DETAIL INFORMATION:	6 THREADS PER INCH	0.167" [4.09] PITCH	495° FULL DEPTH THREADS

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:

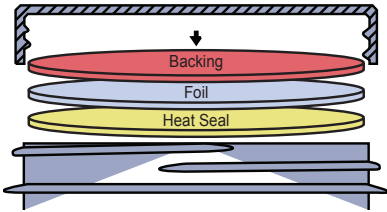


REF NO.:

DWG30960


DESCRIPTION:

28 mm 28-410 Black PP Plastic Cap, Matte Top, Ribbed Sides with Heat Seal Lining S105 FS3-19 For PET

Product	S105 FS 3-19		
Scope	One piece foam backed heat induction foil innerseal that will provide an aggressive bond with clean peel removal from PET and PVC containers. (Not recommended for use on CPET. Easy access / "puncture foil" when wax bonded to pulp.)		
Composition	Material	Standard	Metric
	Backing	.0105"	.2667mm
	Foil	.001"	.0254mm
	Heat Seal	.0005"	.0127mm
			
	Adhesive or resin bonding layers not shown.		
FDA Status: 21 CFR 177.1210	Recommended Storage and Handling: Refer to Website		
Drug Master File (DMF): #4544	EU / EP Reg.:		
GTR Oxygen: Essentially Zero	MVTR: Essentially Zero		
Print Location (if any):	Heat Seal Layer and/or Backing		

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY: 	REF NO.: DWG30960
DESCRIPTION: 28 mm 28-410 Black PP Plastic Cap, Matte Top, Ribbed Sides with Heat Seal Lining S105 FS3-19 For PET	