

SECTION A-A

REFERENCE	DIMENSION	TOLERANCE	UNITS
E	1.013 [25.73]	±0.010 [0.25]	in [mm]
T	1.088 [27.64]	±0.010 [0.25]	in [mm]
H	0.695 [17.65]	±0.010 [0.25]	in [mm]
OAH	0.745 [18.92]	±0.010 [0.25]	in [mm]
OD	1.197 [30.40]	±0.010 [0.25]	in [mm]
PART WEIGHT	2.55	±0.50	g
THREAD DETAIL INFORMATION: 6 THREADS PER INCH 0.167" [4.09] PITCH 495° FULL DEPTH THREADS			

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:




REF NO.:

DWG30961

DESCRIPTION:

28 mm, 28-410 White Ribbed PP Plastic Cap, Smooth Top, with U5 LPE & F217 Nylon Liner, L&P For PE/PP
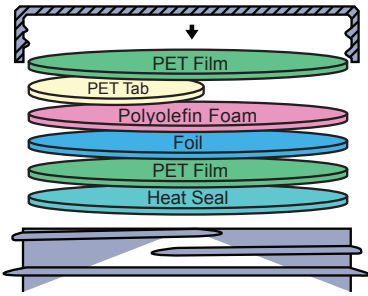
<b>Product</b>	Lift 'n' Peel™ U5 LP-E																							
<b>Scope</b>	One piece top-tabbed induction seal with foam backing that features an easily opened clean peel design for use on PE and PP.																							
<b>Composition</b>	<table border="1"> <thead> <tr> <th>Material</th> <th>Standard</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>PET Film</td> <td>0.001"</td> <td>0.025mm</td> </tr> <tr> <td>PET Tab</td> <td>0.0005"</td> <td>0.013mm</td> </tr> <tr> <td>Polyolefin Foam</td> <td>0.0045"</td> <td>0.114mm</td> </tr> <tr> <td>Foil</td> <td>0.001"</td> <td>0.025mm</td> </tr> <tr> <td>PET Layer</td> <td>0.0005"</td> <td>0.013mm</td> </tr> <tr> <td>Heat Seal</td> <td>0.0015"</td> <td>0.038mm</td> </tr> </tbody> </table>	Material	Standard	Metric	PET Film	0.001"	0.025mm	PET Tab	0.0005"	0.013mm	Polyolefin Foam	0.0045"	0.114mm	Foil	0.001"	0.025mm	PET Layer	0.0005"	0.013mm	Heat Seal	0.0015"	0.038mm		<p>Composition does not include adhesive or resin bonding layers (if any).</p>
Material	Standard	Metric																						
PET Film	0.001"	0.025mm																						
PET Tab	0.0005"	0.013mm																						
Polyolefin Foam	0.0045"	0.114mm																						
Foil	0.001"	0.025mm																						
PET Layer	0.0005"	0.013mm																						
Heat Seal	0.0015"	0.038mm																						
<b>FDA Status:</b> 21 CFR 177.1210	<b>Recommended Storage and Handling:</b> Refer to website																							
<b>Drug Master File (DMF):</b> 11485	<b>EU / EP Reg.:</b>																							
<b>GTR Oxygen:</b> Essentially zero	<b>MVTR:</b> Essentially zero	<b>Manufacturing Location:</b> North America																						
<b>Print Location (if any):</b> PET Tab																								

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:




REF NO.:

DWG30961

DESCRIPTION:

28 mm, 28-410 White Ribbed PP Plastic Cap, Smooth Top, with U5 LPE & F217 Nylon Liner, L&P For PE/PP

- This data sheet describes F-217® products
- This product is a three-ply co-extruded liner consisting of a foamed Low Density Polyethylene (LDPE) core sandwiched between two layers of solid Low Density Polyethylene

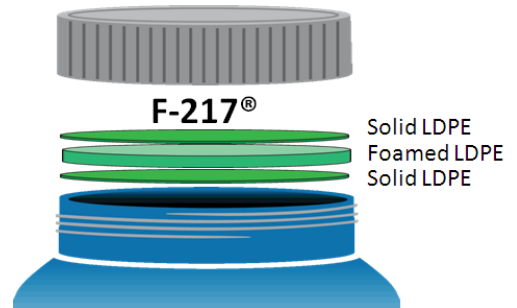

## Typical Product Attributes

### Construction

Structure	Solid LDPE / Foamed LDPE / Solid LDPE	Solid LDPE / Foamed LDPE / Solid LDPE
Color	White or as Specified	White or as Specified
Density		
for 20 ~ 30 mil (0,51 ~ 0,76 mm)	0,48 ± 0,03 g / cm <sup>3</sup>	30 ± 2 lbs / ft <sup>3</sup>
for 35 ~ 125 mil (0,89 ~ 3,18 mm)	0,40 ± 0,03 g / cm <sup>3</sup>	25 ± 2 lbs / ft <sup>3</sup>
Thickness Tolerance		
for 20 ~ 60 mil (0,51 ~ 1,52 mm)	± 0,127 mm	± 5 mil
for 65 ~ 90 mil (1,65 ~ 2,29 mm)	± 0,178 mm	± 7 mil
for 95 ~ 125 mil (2,41 ~ 3,18 mm)	± 0,254 mm	± 10 mil
Available Width		
for 20 ~ 60 mil (0,51 ~ 1,52 mm)	22,2 ~ 1016,0 mm	7/8 ~ 40 inch
for 65 ~ 125 mil (1,65 ~ 3,18 mm)	25,4 ~ 228,6 mm	1 ~ 9 inch
Width tolerance	± 1,6 mm	± 1/16 inch

### Regulatory Compliance

FDA Compliance	21 CFR 177.1520 (Olefin Polymers) 21 CFR 177.1210 (Closures with Sealing Gaskets for Food Containers) 21 CFR 175.300 (Resinous and Polymeric Coatings)
Drug Master File (DMF)	2434
Other Compliances	USFDA Food Allergen Guidelines; California Proposition 65 Labeling Requirements; Limitations of Heavy Metals in Packaging per CONEG & EU 94/62/EC, Article 11

DISTRIBUTED BY:



REF NO.:

DWG30961

**DISCLAIMER**  
THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DESCRIPTION:  
28 mm, 28-410 White Ribbed PP Plastic Cap, Smooth Top, with U5 LPE & F217 Nylon Liner, L&P For PE/PP