


Fibre Drum

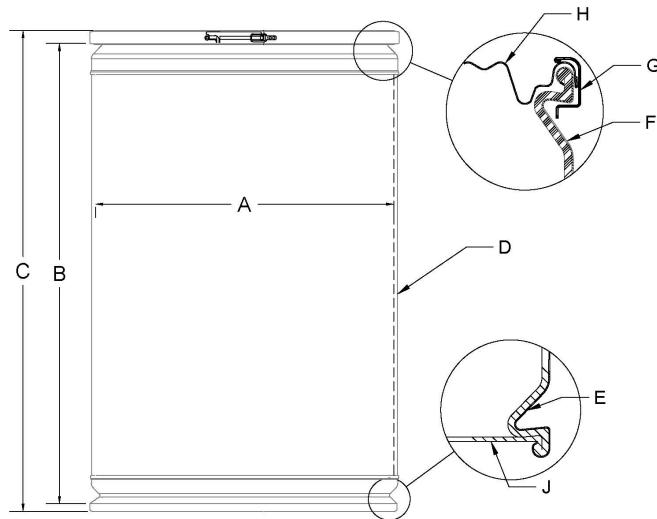

Specification

NMFC Article	Item 291 - Dry or Solid
NMFC Net Weight Limit	225#
UN Mark	None
Drum Type	Lok-Rim
Inside Diameter (A)	18.5"
Inside Height (B)	27.75"
Outside Height (C)	28.75"
Tare Weight (approx)	9.7#
Nominal Capacity (U.S. Gallons)	32 Gallons
Exterior Finish	Plain Kraft
Sidewall Construction (D)	Min Thickness 700 PSI Mullen
Sidewall Adhesive	Sodium Silicate Between Each Lamination
Lining (D)	None
Barrier (D)	None
Bottom Thickness/Test (J)	.120"/1000# PSI Heading
Chime Band Top (F)	.022 Narrow Galvanized Steel
Chime Band Top Overlay (F)	None
Chime Band Bottom (E)	.022 Narrow Galvanized Steel
Closure (G)	Galvanized Steel
Cover Type (H)	Fibre .120"
Cover - Gasket / Fittings / Diaphragm	None

Additional Construction Information	None
Paint or Skin Color	None
Silk Screen Color(s)	None
Poly Bag / Bag Option	None
Misc. Treatments	None
Special Instructions	Certificate stamp on sidewall

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31819

DESCRIPTION:

32 Gallon Kraft Fiber OH Drum, Plain Fiber Cover, Metal Lever Lock Ring