

SECTION A-A SCALE 3 : 2

.167 PITCH - 6 THREADS PER INCH 380° FULL DEPTH THREAD

REFERENCE	TOLERANCE	DIMENSION	UNITS
E	±0.010 [0.25]	1.396 [35.46]	in [mm]
Т	±0.010 [0.25]	1.488 [37.80]	in [mm]
H (Seated)	REFERENCE	0.521 [13.23]	in [mm]
H (Inner)	±0.008 [0.20]	0.388 [9.86]	in [mm]
OD	±0.013 [0.33]	1.760 [44.70]	in [mm]
OAH	±0.011 [0.28]	0.671 [17.04]	in [mm]
PART WEIGHT	± 0.7	7.1	g


**DISCLAIMER** 

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.



REF NO.:

**DWG**30417

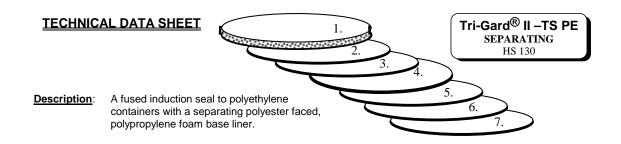

## **SPECIFICATIONS**

Property	Value	
Odor	None	
Odoi	Detected	
Taste	None	
Taste	Detected	
GTR	Near Zero	
MVTR	Near Zero	

Availa	Available Web Width		
Minimum	Maximum	Deviation	
[in/mm]	[in/mm]	[in/mm]	
1" / 25.4mm	40" / 1016mm	+/- 1/16"/ 1.6mm	

## Construction

	Material	Thickness [in]	Thickness [mm]
1.	Co-extruded PP Foam with PP skins	0.0300	0.762
2.	Polyester	0.0005	0.013
3.	Wax	0.0005	0.013
4.	White Paper	0.0050	0.130
5.	Aluminum Foil	0.0010	0.026
6.	Polyester	0.0005	0.013
7.	Polyethylene Heat Seal	0.0015	0.039
	Total Structure	0.037 +/- 0.003	0.94 +/- 0.1

## Code of Federal Regulations Compliance: Complies to the following CFR's

21CFR177.1520 Olefin polymers.

21CFR177.1210 Closures with sealing gaskets for food containers. 21CFR178.2010 Antioxidants and or stabilizers for polymers.

21CFR175.300

Resinous and polymeric coatings.

**DMF Status:** The component materials are listed in DMF 2434 and/or 1378

Original Date 04/07/00 **Revised Date: 06/20/01 Revision Number:1** 

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:

**DESCRIPTION:** 

ipeline Packaging

REF NO.:

**DWG**30417