




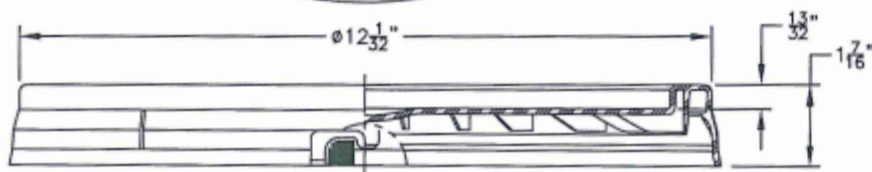

- NOTES:
 WEIGHT:
 -290 GRAMS
 WALL THICKNESS:
 -.090"
 MATERIAL:
 • PREMIUM HDPE INJECTION RESIN
 • AVAILABLE IN A WIDE RANGE OF COLORS TO MEET CUSTOMER REQUIREMENTS
 CLOSURES:
 • MULTIPLE PUSH & CRIMP ON SPOUT OPTIONS AND SCREW CAP AVAILABLE
 GASKETS:
 • BLACK FDA GASKETS STANDARD
 • MULTIPLE COMPOUNDS AVAILABLE

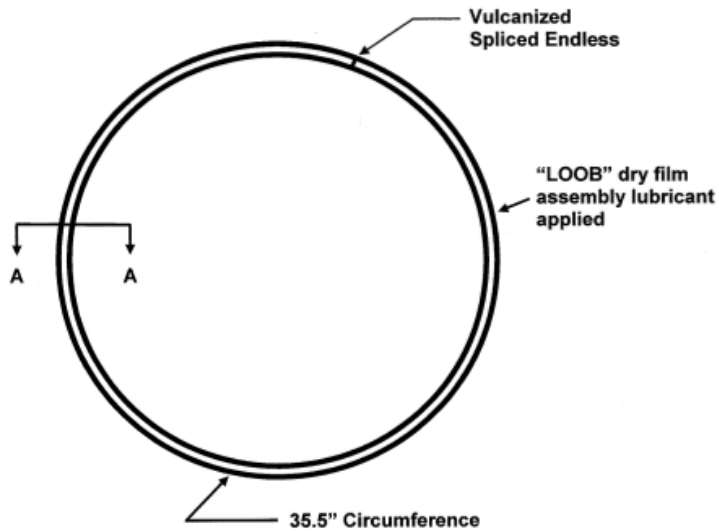

GASKET



Tolerances:

- Diameter ± .010"
- Wall Thickness ± .005"
- Circumference ± .125"

Material: Compound #7074 or 7076, 70 Duro (Shore A), ASTM D 2000-98 M2AA706A13B13B33F17 plus tension set. Black color. Gasket material, splice adhesive, and assembly lubricant meet FDA Standard 21CFR177.2600. NAMPAC Part # 590145

DISTRIBUTED BY:



REF NO.:

DWG30152

DISCLAIMER
 THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DESCRIPTION:
 White HDPE Tear Tab Cover w/ Rieke Flex Spout for 3.5
 - 7 Gallon Pails