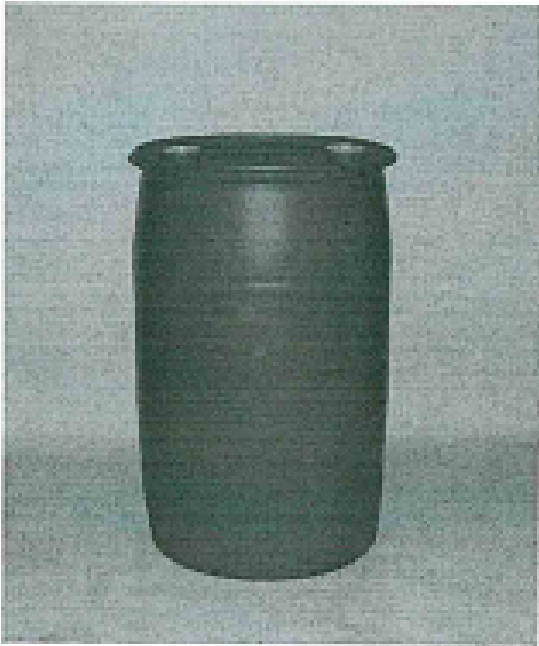


<p><b>Regulatory Information:</b></p> <p>un 1H1/Y1.9/150 (Test Report P128)</p> <p>un 1H1/Y1.4/100 (Test Report P122)</p>	<p><b>Bill of Materials:</b></p> <p><b>Body:</b> GP-35, extrusion blow molded high molecular weight high density polyethylene (HMW-HDPE)</p> <p><b>Fittings:</b> 2" BTR and 2" NPS. (BTR = Buttress, NPS = National Pipe Straight thread)</p>	<p><b>Product Illustration:</b></p> 
---	---	--

<p><b>Nominal Capacity:</b> 35.0 U.S. Gallons</p>	<p><b>Outage:</b> 2.2 U.S. Gallons</p>	<p><b>Overall Height:</b> 33.9 inches</p>	<p><b>Total Weight:</b> 15.4 lbs.</p>
<p><b>Actual Capacity:</b> 37.2 U.S. Gallons</p>	<p><b>Outage %:</b> 6.3 %</p>	<p><b>Body Height:</b> 33.9 inches</p>	<p><b>Body Weight:</b> 15.2 lbs.</p>
<p><b>Export Cubes:</b> 6.89 cu. ft.</p>	<p><b>Nominal O.D. :</b> 19.1 inches</p>	<p><b>Mid Panel Height:</b> 10.5 inches</p>	<p><b>Min. Wall Thickness:</b> 0.140 inches</p>

**Special Notes:**

- 1) Maximum filling temperature 150 F for all foods and other FDA regulated substances. 160 F for all non-foods and other substances that are not regulated by FDA. When filled at these recommended maximum filling temperatures drums should be allowed to cool to ambient prior to stacking. Drums filled at elevated temperatures should be vented properly to prevent vacuum formation within the drum which can compromise stacking capability.
- 2) Drums may be stacked 4 high (1+3) maximum with pallets between drums, maximum top load on bottom drums not to exceed 700 lbs each. Pallets should be of good quality that provides adequate support for plastic drums.
- 3) Handle with parrotbeak, side grabber, and sling.
- 4) Recycle symbol embossed on bottom.
- 5) Compatibility with hazardous materials as listed in 49CFR are the responsibility of the filler.
- 6) Manufactured in Houston and Lockport under test report P128. Manufactured in Lockport only under test report P122 for higher ESCR performance.

Data, dimensions, and information provided on this document are provided as a guide only. Please refer to the actual product for the most current information.

**DISCLAIMER**

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG30617

DESCRIPTION: 35 Gallon Blue Plastic Tight Head Drum with 2 in and 2 in Fittings