(I) HEADSPACE		
		UNDER CORK
MIN. CAP.	3.54%	2.79%
IDEAL CAP.	4.46/	3.72%
MAX. CAP.	5.36%	4.64/


15°

,157

"C" DIMENSION CONTROLS OPENING TO ,625 (15.88) DOWN FROM TOP OF FINISH EXCLUDING RADIUS

DPENING FROM .125 cs.173 DOWN TO .625 DOWN TO BE NO LESS THAN .708 tt7.997AND GREATER THAN .748 tt9.001

FOR GOOD CORK FIT — CONTROL OPENING BELOW .125 _{C3.173} DOWN TO BE SLIGHTLY GREATER THAN SMALLEST OPENING ABOVE

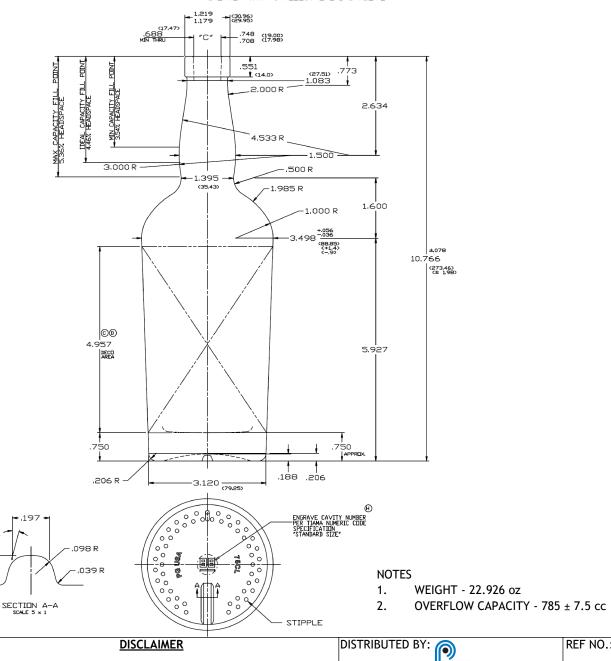

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

lipeline Packaging

REF NO.:

DWG10352

DESCRIPTION:

750 mL Tennessee Bar Top, 18.5 mm