


See Spout & Orifice Data Below

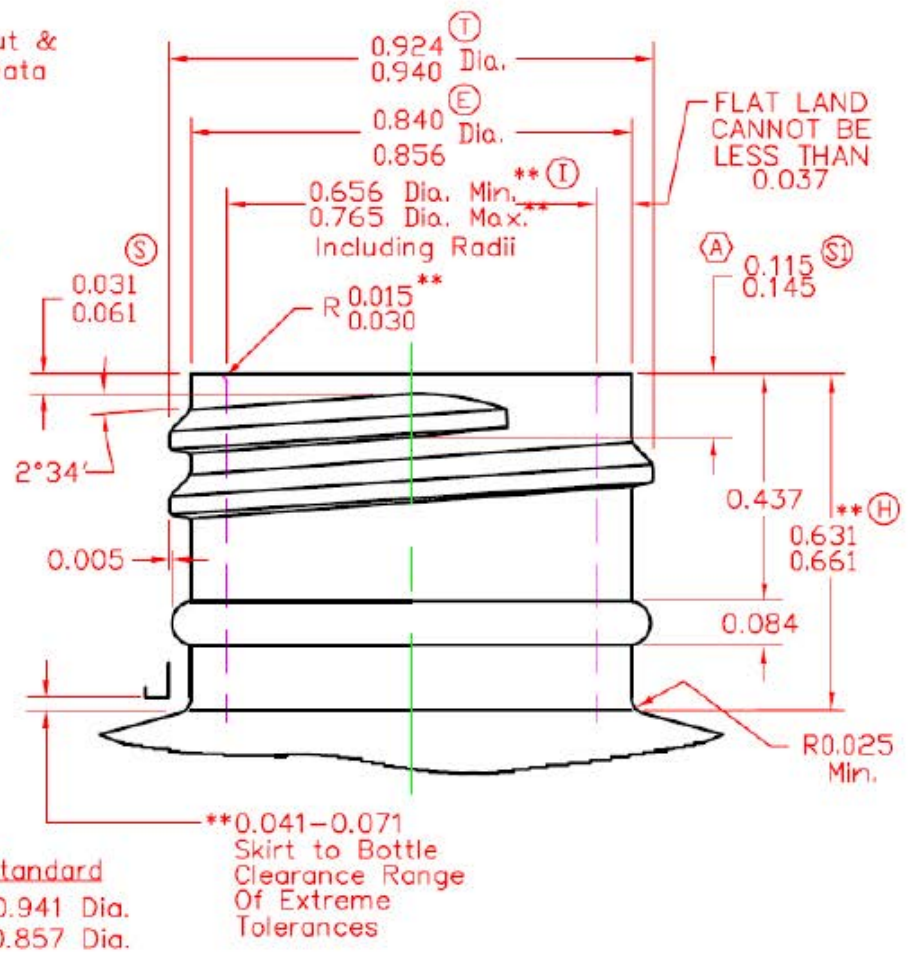


A
Per C.M.A. Standard
"T" = 0.955/0.941 Dia.
"E" = 0.871/0.857 Dia.

**0.041-0.071 Skirt to Bottle Clearance Range Of Extreme Tolerances

Seal Type No. 1: Valve Seal (The most efficient provided bottle has proper "I" dimension)
 † Seal Type No. 2: Land Seal ("I" dimension of bottle less critical than above)
 Dimensions marked * are an average of two measurements taken 90° apart.
 GENERAL TOLERANCE NOT SHOWN OTHERWISE: ± .008

BOTTLE NOTES:
 1) Thread: 8 Pitch, Per S.P.I. Standard.
 2) Diameters must be concentric within .015" T.I.R.
 3) All Dimensions are in inches unless otherwise indicated.

DISCLAIMER	DISTRIBUTED BY: 	REF NO.:
THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.	DESCRIPTION:	