



## Specifications

Diameter:	38 mm
Thread Profile:	Jump Thread
Neck Finish:	38-400
Closure Top:	Stipple
Closure Sidewall:	Fine Ribbed
Material:	PP
Sealing System:	Standard Liner
Case Count:	2,900
Case Weight:	27 lb
Cases/Pallet:	35

### DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

**DWG30812**

DESCRIPTION:

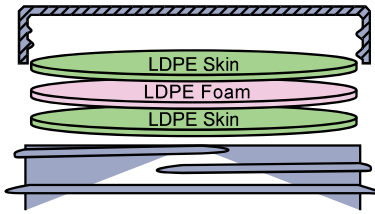
38-400 Yellow PP Matte Top, Ribbed Sides Cap w/  
040 Uni-Foam US Liner

# Uni-Foam US™


## Technical Data Sheet

### Uni-Foam US™ .040" LDPE Foam

Revision: 040UNIFOAMUS-08072017

Product	Uni-Foam US™ .040" LDPE Foam														
Scope	A three-ply co-extruded white liner consisting of a closed cell foam produced from Low Density Polyethylene (LDPE) faced with solid LDPE on both sides.														
Composition	<table><tr><th>Material</th><th>Standard</th><th>Metric</th></tr><tr><td>LDPE - Solid</td><td></td><td></td></tr><tr><td>LDPE Foam</td><td>0.040" overall</td><td>1.016 mm overall</td></tr><tr><td>LDPE - Solid</td><td></td><td></td></tr></table>	Material	Standard	Metric	LDPE - Solid			LDPE Foam	0.040" overall	1.016 mm overall	LDPE - Solid			 <p><b>Overall Thickness Tolerance: ± 0.005" (± 0.127mm)</b></p>	
	Material	Standard	Metric												
LDPE - Solid															
LDPE Foam	0.040" overall	1.016 mm overall													
LDPE - Solid															
Color	White														
Density: 25 lbs/ft³ (0.40g/cm³) Density Tolerance : ± 2 lbs/ft³ (± 0.032 g/cm³)		Width Tolerance: ± 0.0625" (± 1.6mm)													
FDA Status: 21 CFR 177.1520 (Olefin Polymers); 21 CFR 177.1210 (Closures with Sealing Gaskets for Food Containers); 21 CFR 178.2010 (Antioxidants and/or Stabilizers for Polymers); 21 CFR 175.300 (Resinous and Polymeric Coatings)		USP 40/NF 35, <661.1> Plastic Materials of Construction													
Drug Master File (DMF): #4544 Pending		EU / EP Reg.: EU No. 10/2011, EU No. 1935/2004, EP Monograph 3.1.3, Edition 9, Supplement 9.1													
GTR Oxygen: 751cc/(m²·day) ASTM D-3985		MVTR: 2.24 g/(m²·day) ASTM F-1249													
Print Location (if any):		Recommended Storage and Handling: Refer to Website													

Selig materials are compliant with current USFDA Food allergen Guidelines.  
 Selig materials are compliant with California Proposition 65 labeling requirements.  
 Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.  
 MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

<p align="center"><b><u>DISCLAIMER</u></b></p> <p>THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.</p>	<p>DISTRIBUTED BY:  Pipeline Packaging™</p>	REF NO.:
	<p>DESCRIPTION: 38-400 Yellow PP Matte Top, Ribbed Sides Cap w/ 040 Uni-Foam US Liner</p>	DWG30812