


| | |
|---|--------------|
| Glass Finish: GPI 450 | |
| A (Plug Dia.) | 2.654/2.679" |
| B (Outside Dia.) | 2.883/2.937" |
| C (Overall Height) | .602/.631" |
| D (Compound Thickness) | .030/.055" |
| Pull Down Max | 10 in. Hg |
| Release Min | 2 in. Hg |
| Materials | |
| Electrolytic tin plate or Tin free steel | |
| • Minimum Nominal Thickness: .00605" | |
| Interior Coating | |
| • Food grade interior coating system specified according to product requirement. (FDA compliant) | |
| Exterior Coating | |
| • White, clear or gold base coat with over varnish as required | |
| • Printing decoration according to customer specification. | |
| Compound | |
| • Food grade plastisol according to thermal process (pasteurisation, hot fill and cool, dry seal, retort) and product type (oily and non-oily). (FDA compliant) | |

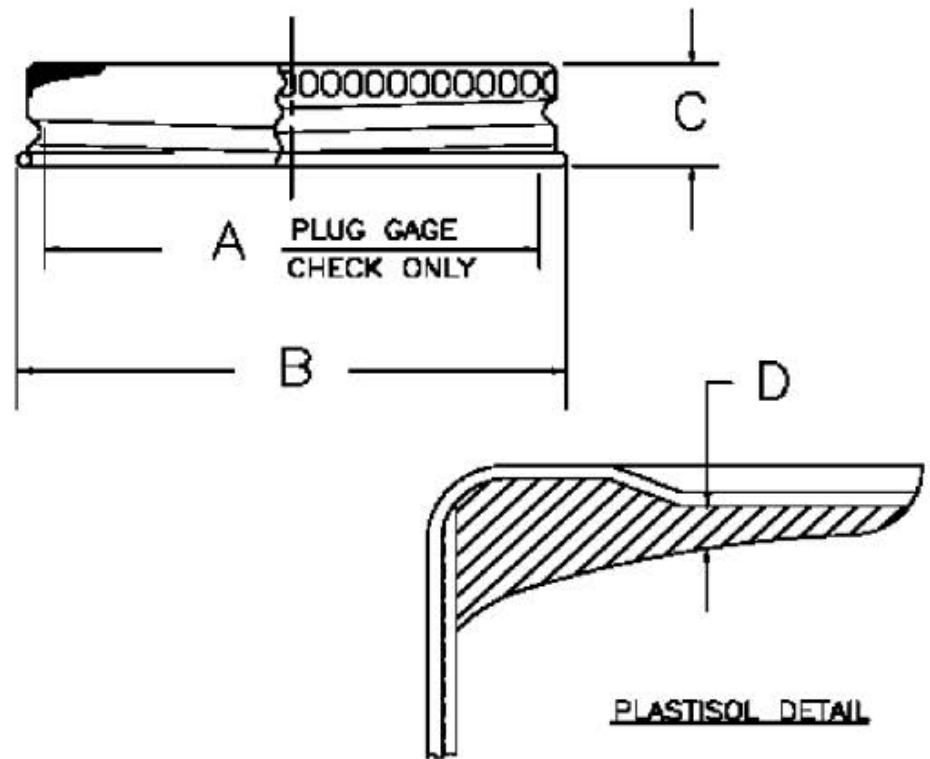

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DESCRIPTION: