


## NOTES:

- I. .040 LINER SHOWN
- 2. DIAMETERS TO BE TAKEN AS AVERAGE
- 3. THREAD PROFILE: MODIFIED BUTTRESS
- 4. REFERENCE QIM-500-A105 FOR NECK FINISH REQUIREMENTS
- 5. RECOMMENDED 48 HOUR-REMOVAL TORQUE: 8-12 IN. LBS
- 6. MAT'L: POLYPRO

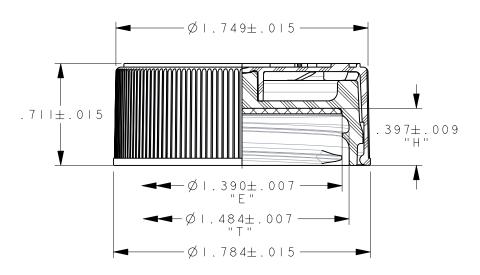

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING	DISTRIBUTED BY: <b>peline</b> Packaging	REF NO.: DWG30871
ENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT E PROPER CONTAINER FOR PRODUCT AND APPLICATION MPATIBILITY.	DESCRIPTION: 38-400 White PP Plastic Child Resistant Cap, Push Down & Turn, .035 M1 Heat Seal for PE	