


SIZE 63 MM CT SCREW CAP  
METAL CLOSURE  
CONTINUOUS THREAD DIMENSIONS

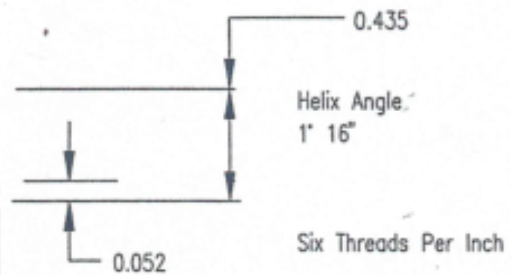

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31855

DESCRIPTION:

63-400 Black Metal Screw Cap, PALF Liner

# PRODUCT DATA SHEET

## Pulp and Aluminum Foil (PAF)

### 35 Pulp

#### LINER DESCRIPTION

**Description:** A pulp backed primary liner with a barrier facing consisting of paper backed aluminum foil. This liner provides reseal and very good barrier to moisture and oxygen.

**FDA Status:** Complies with 21 CFR177.1210, 176.180, and 176.179

#### PHYSICAL AND CHEMICAL PROPERTIES

1. **Color** Matte Manila (non-product side);  
Gloss metallic (product side)
2. **Thickness, mils**
  - a) Aluminum Foil 1.5
  - b) Paper 2.5
  - c) Pulp Board 35.0

Thickness tolerance +/- 10%

Minimum width 1.0 in

Width Tolerance +/- 0.0625

3. **Oxygen Transmission** Essentially Zero
4. **Water Vapor Transmission** Essentially Zero

#### LINER RECOMMENDED

#### STORAGE CONDITIONS

The material should be stored in well-ventilated area (temp. 60° - 80°F; RH – 40% - 60%). Avoid storing over extended periods. Avoid contamination.

**PAF should not be used with any aqueous, acidic, alkaline, or corrosive products.**

#### DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31855

DESCRIPTION:

63-400 Black Metal Screw Cap, PALF Liner