

## TECHNICAL DATA SHEET


### Cap size: 70-450 PLDS (KD-70-S3/S-1661)

**Description:** PLDS cap with knurls, panel #23, made for sealing glass jars containing food or juice.

#### DIMENSIONS

**Glass Finish:** GPI 450

<b>A (Plug Dia.)</b>	2.655/2.675"
<b>B (Outside Dia.)</b>	2.882/2.937"
<b>C (Overall Height)</b>	.601/.631"
<b>D (Compound Thickness)</b>	.027/.052"

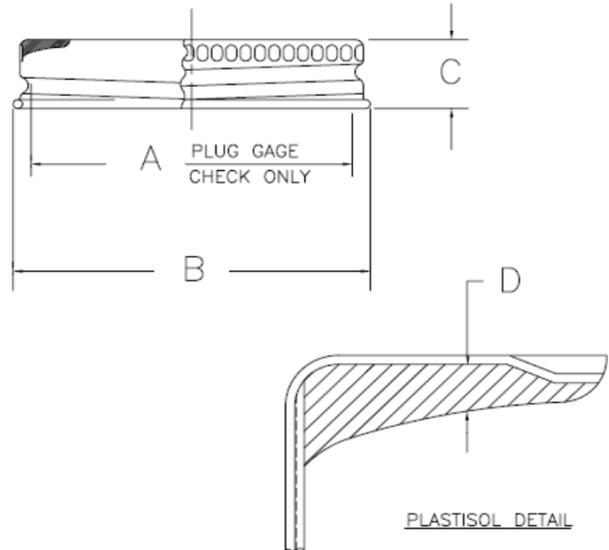

#### Materials

**Electrolytic tin plate or Tin free steel**

- Minimum Nominal Thickness: .00605"

#### Interior Coating

- Food grade interior coating system specified according to product requirement. (FDA compliant)

#### Exterior Coating

- White, clear or gold base coat with over varnish as required
- Printing decoration according to customer specification.

#### Compound

- Food grade plastisol according to thermal process (pasteurization, hot fill and cool, dry seal, retort) and product type (oily and non-oily). (FDA compliant)

#### PACKAGING

Carton		Pallet	
Size (in)	20 x 11.5 x 16	Size (in)	40 x 46 x 85
Caps Qty.	725	Cartons per pallet	40
Gross Weight	20.3 lbs.	Caps per pallet	29000

**Stacking:** Cap cartons should not be stacked more than 2 pallets high

**Storage conditions:** Temperature range from 40 - 86°F (5 - 30°C) - relative humidity below 70%.

Closures should be used within 2 years of the manufacturing date on the carton (Deviation granted under Crown's approval).

DISTRIBUTED BY:



REF NO.:

DWG31956

DESCRIPTION:

70G-450 Metal Screw Cap with Plastisol Liner, No Button

#### DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.