


For Reference Only

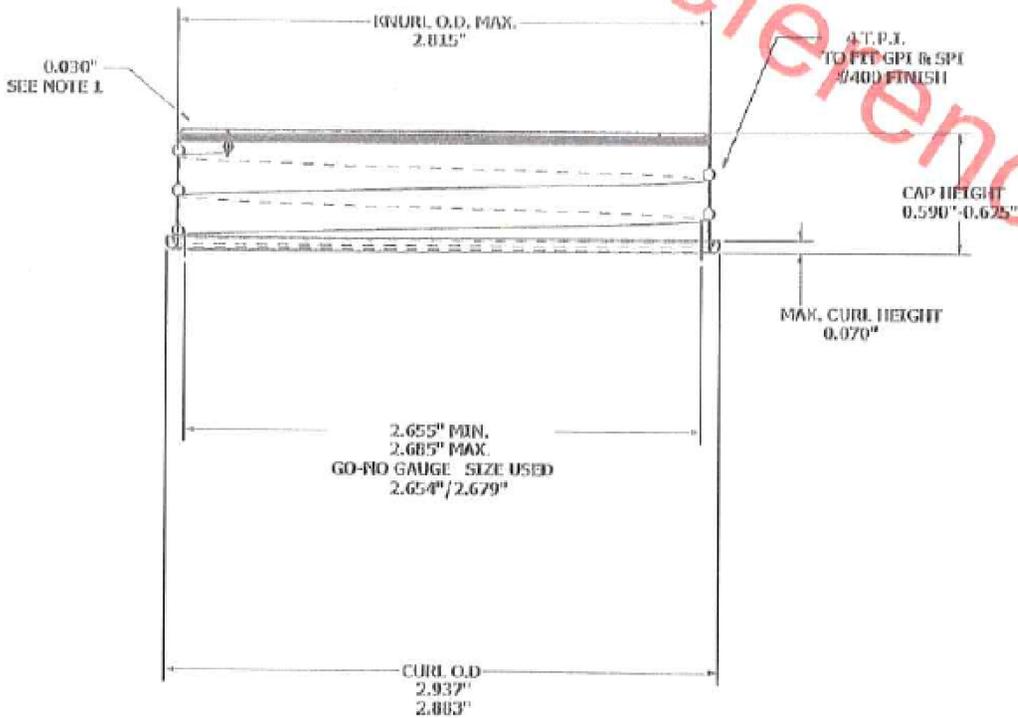

70-450 CT CAP "FIS" FLAT TOP STACKING PANEL LPD BUTTON WITH PLASTISOL LINER MATERIAL .75# T-4, 55# DR-9 PULL DOWN VACUUM 8.0 IN. HG. MAX. WITH A VACUUM RETURN 2.0 IN. HG. MIN.

NOTES

1) A RECESSED STACKING FEATURE INVOLVING A RAISED OUTSIDE EDGE IS ACHIEVED BY INCREASING THE HEIGHT OF FLAT TOP CAP BY APPROX. 0.030"

THE MAX. & MIN. INSIDE DIAMETER OF THE THREAD ARE DETERMINED BY ROUND MAX. & MIN. PLUG GAUGES. THE CLOSURE SHOULD PERMIT ENTRY OF THE MIN. GAUGE AND NO ENTRY, TO ENTRY WITH A SLIGHT DRAG ON THE MAX. GAUGE.

 30310 Emerald Valley Pkwy
Glenwillow, OH 44139

PPC ITEM NUMBER: 70212	SKU: 05-22-019-00056
DRAWN BY: -	CHECKED BY: -
DATE: 2/13/2019	

DESCRIPTION: 70G-450 Continuous Thread Closure	COLOR: -
PART MATERIAL: -	VOLUME: -
WEIGHT: -	
DWG NO.: -	DWG SIZE: A
SHEET NO: 1 of 1	REV: -

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF PIPELINE PACKAGING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF PIPELINE PACKAGING IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:

UNITS OF MEASURE: Inches

TOLERANCES: Specified in drawing